

# PERUN

# V2

## USER MANUAL

### 1. General information

**Perun V2** is an electronic circuit replacing traditional, mechanical contacts in version 2 gearboxes. It increases reliability and rate of fire, as well as provides additional functions. An integral part of **Perun V2** is low-resistance wiring replacing regular wires.

**Warranty - 1 year**

**Allowed battery types:**

Li-Po, 2 to 4 cells (7.4V to 14.8V)

NiMH/NiCd, 8 to 10 cells (9.6 to 12V)

Li-Fe, 3 cells (9.9 V)

*ATTENTION! The device must never be run without a fuse.*

**Power consumption while idle:** 1,6mA

*ATTENTION! Do not leave your replica with the battery plugged in for a longer period of time (more than a few days), because of the risk of complete battery discharge (which will permanently damage the battery).*






To activate low battery voltage warning, enter the programming mode for any of the selector positions and press the trigger 15 times (after 10<sup>th</sup> time signal of AB being turned on/off will be heard, do not mind it and continue). If the AB is about to be activated, there will be a single sound signal after the 15th trigger pull, if deactivated - a double sound signal. Save the settings by pressing and holding the trigger until confirmed by a sound signal.

## 6. Double shot

If the double shot function will be activated and semi-automatic firing mode will be set, shots will be fired both when the trigger is pressed and released.

To turn the double shot on, set safe mode on any of the selector positions then press and hold the trigger until you hear a sound signal. To turn the feature off, press and hold the trigger again on safe mode.

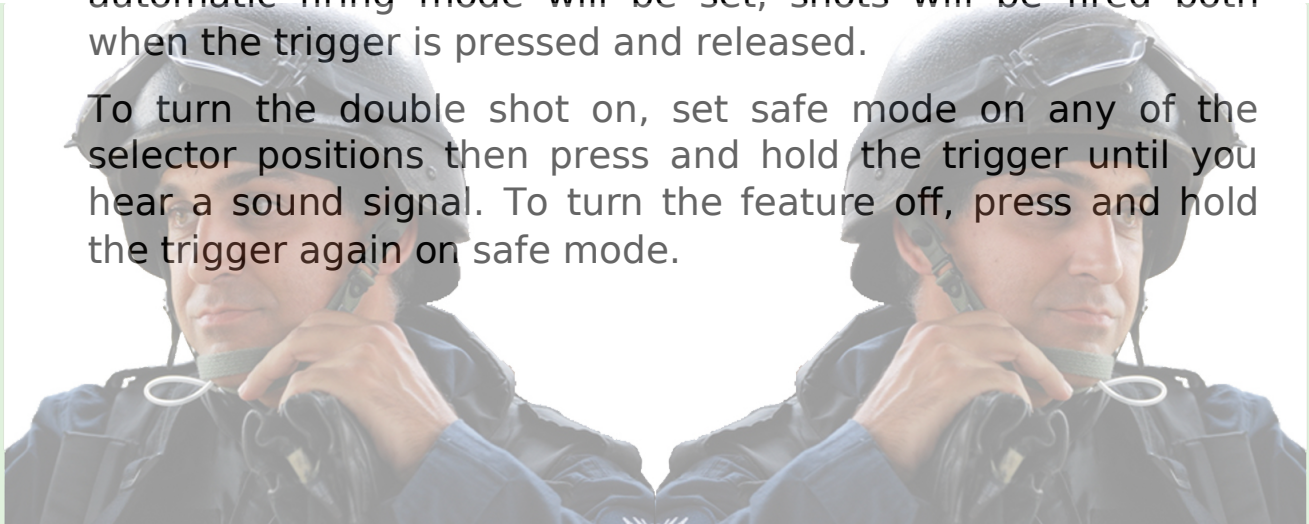

UNIVERSO SIMPER  
AIRSOFT

UNIVERSO SIMPER  
AIRSOFT