



Sound Suppressor

Selector Lever

Charging Handle

Ambidextrous Sling Swivel

Rail System

Trigger

Ladder Rail Panel

Crane Stock

Trigger Guard

Stock Release Lever

Reinforced Grip

Mid-Cap 120R Magazine

INSTRUCTION MANUAL

GP4 COB-S MINI

AEG BLOW BACK SYSTEM



⚠ WARNING !!

- Adult supervision required.
- Always wear safety goggles when using this product.
- Misuse or careless handling of this product may cause injury.
- May be hazardous up to 50 meters.
- This product is intended for users 18 years or older.
- Read all instructions before using this product.
- The buyer and the user of this product shall adhere to all local laws regulating the usage and the ownership of airsoft guns.



FIRING MODE & SAFETY

⚠ CAUTION

1. Please select quality battery with the CE approval, to avoid any unnecessary damage on the product.
2. Please use either 8.4V or 9.6V battery, if different voltage used, it might damage the product.
3. Remove the battery from the product when it is not in use.
4. Do not wet nor incinerate the battery, nor to deform the terminal.



SAFETY ON
The trigger cannot be pulled




SEMI AUTO
Single shot




FULL AUTO
Automatic firing

COMPONENTS

BATTERY SETTING



1. Charge up the battery.
2. Charging will be completed after 3 hours.



1. Push the butt plate lock (both sides)
2. Pull out the butt plate.




Take off the cover.



Pull out the wire connector.



Connect battery plug with the connector until you heard a click sound.



Insert the battery into stock.



Reinstall the battery cover and butt plate.

SETTING MAGAZINE

⚠ CAUTION

It is strongly recommended the use of G&G BB pellets only. Using low quality BB pellets will shorten product life span and void product warranty.


Magazine Style 420R BB Loader

[Optional Parts]

Model No. G-08-100-1



LOADING EASIER FASTER



Load G&G 5.95mm BB pellets into the magazine.



Insert the magazine until you heard a click sound.

HOP-UP ADJUSTMENT

⚠ CAUTION

Do not catch your fingers in the dummy bolt. Never hold the gun sideways as the BB pellets will curve right or left.



Turn to **Normal** Turn to **Hop**

Too much Hop-up. (Turn the adjust lever toward Normal)

Best Position. ○

Not enough Hop-up. (Turn the adjust lever toward Hop) or Too much Hop-up. (Turn the adjust lever toward Normal)



New Blow Back Pneumatic System

In order to simulate the bolt action of a real firearm, G&G is proud to present its new Pneumatic Blow Back system to its line of airsoft guns. Conventional airsoft blow back utilizes tow hook springs that connect to the piston head and bolt plate to simulate bolt action, which often lead to excess wear and tear and poor reliability in the gear box. To alleviate the problem of conventional systems, G&G has independently developed the Pneumatic Blow Back system for a better solution on simulating bolt actions. This new technology utilizes compressed air to move the bolt, which enables the action without adding extra stress to the gear box. This class leading system represents a significant milestone in the airsoft industry.



TAIWAN
Patent No : M300797



USA
Patent No : 11/488698



HONG KONG
Patent No : 06107627.0



JAPAN
Patent No : 實願2006-1459



EUROPEAN UNION
Patent No : 460191 814454



CHINA
Patent No : 200620122468.9



DENMARK
Patent No : BA2007 0069



U.K.
Patent No : 614422.4



**FUTURE INNOVATION
FINEST QUALITY
FAST SERVICE
FREE ITEMS
FAIR PRICE**

INSTRUCTION MANUAL

GR4 CQB-S MINI

AEG BLOW BACK SYSTEM



RETRACTABLE CRANE STOCK



Press the stock release lever to unlock.




Adjust the position (6 position).


MAINTENANCE



Remove the magazine.



Return the hop up dial to normal position and insert the cleaning rod from the lead edge of the inner barrel.



Be aware to have the rod facing down and reaching to the end, and remove clogged pellets.


TROUBLE SHOOTING



Adjust screw when the gear noise becomes shrilly. Please use the screwdriver to adjust.



No operation. Check the wire set contact with motor.



No operation. Check the battery and connector.

MOVABLE PARTS



Remove the Ladder Rail Panel.



Install the grip. (Optional)

OPTIONAL PARTS



G-12-02D 551 Graphic Sight



G-12-00B 30mm AP Red Dot Sight

PARTS LIST

- CQB MINI - 01 Sound Suppressor
- CQB MINI - 02 Rail System
- CQB MINI - 03 Ladder Rail Panel x 4
- CQB MINI - 04 Outer Barrel Set
- CQB MINI - 05 Hop Up Set
- CQB MINI - 06 Delta Ring
- CQB MINI - 07 Inner Barrel
- CQB MINI - 08 Upper Receiver Set
- CQB MINI - 09 Charging Handle Set
- CQB MINI - 10 Port Cover Set
- CQB MINI - 11 Front Frame Lock Pin Set
- CQB MINI - 12 Bolt Catch Set
- CQB MINI - 13 Selector Lever Set
- CQB MINI - 14 Magazine Catch Set
- CQB MINI - 15 Sling Swivel Mount
- CQB MINI - 16 Enhanced Rod Set
- CQB MINI - 17 Magazine
- CQB MINI - 18 Lower Receiver Set
- CQB MINI - 19 Trigger Guard Set
- CQB MINI - 20 Selector Plate
- CQB MINI - 21 Rear Frame Lock Pin Set
- CQB MINI - 22 Grip Set
- CQB MINI - 23 Motor
- CQB MINI - 24 Grip Bottom Set
- CQB MINI - 25 Crane Stock Set
- CQB MINI - 26 Gear Box Set
- CQB MINI - 28 Blow Back Pneumatic Piston Set
- CQB MINI - 29 Charging Plate Set
- CQB MINI - 30 Charging Upper Cover Set
- CQB MINI - 31 Selector Plate
- CQB MINI - 32 Wire

TAIWAN

Sales Dept. | sales@guay2.com , b2b@guay2.com
Technology Support Dept. | support@guay2.com
PR Dept. | pr@guay2.com

Chang Hua Headquarter | Tel : +886-4-798-9000 Fax : +886-4-798-9900
No.999, Zhonghua Rd. Shengang Township, Changhua County 50955, Taiwan (R.O.C.)


Taipei | Tel : +886-2-2692-2000 Fax : +886-2-2692-4000
11F-3., No.27, Lane 169, Kangning St. Shijr City, Taipei County 22180, Taiwan (R.O.C.)

U.S.A.

E-mail | sales101@guay2.com

Los Angeles | Tel : +1-626-581-0101 Fax : +1-626-581-1011
1122 Coiner Court, City of Industry, CA 91748 (U.S.A.)

Dealer

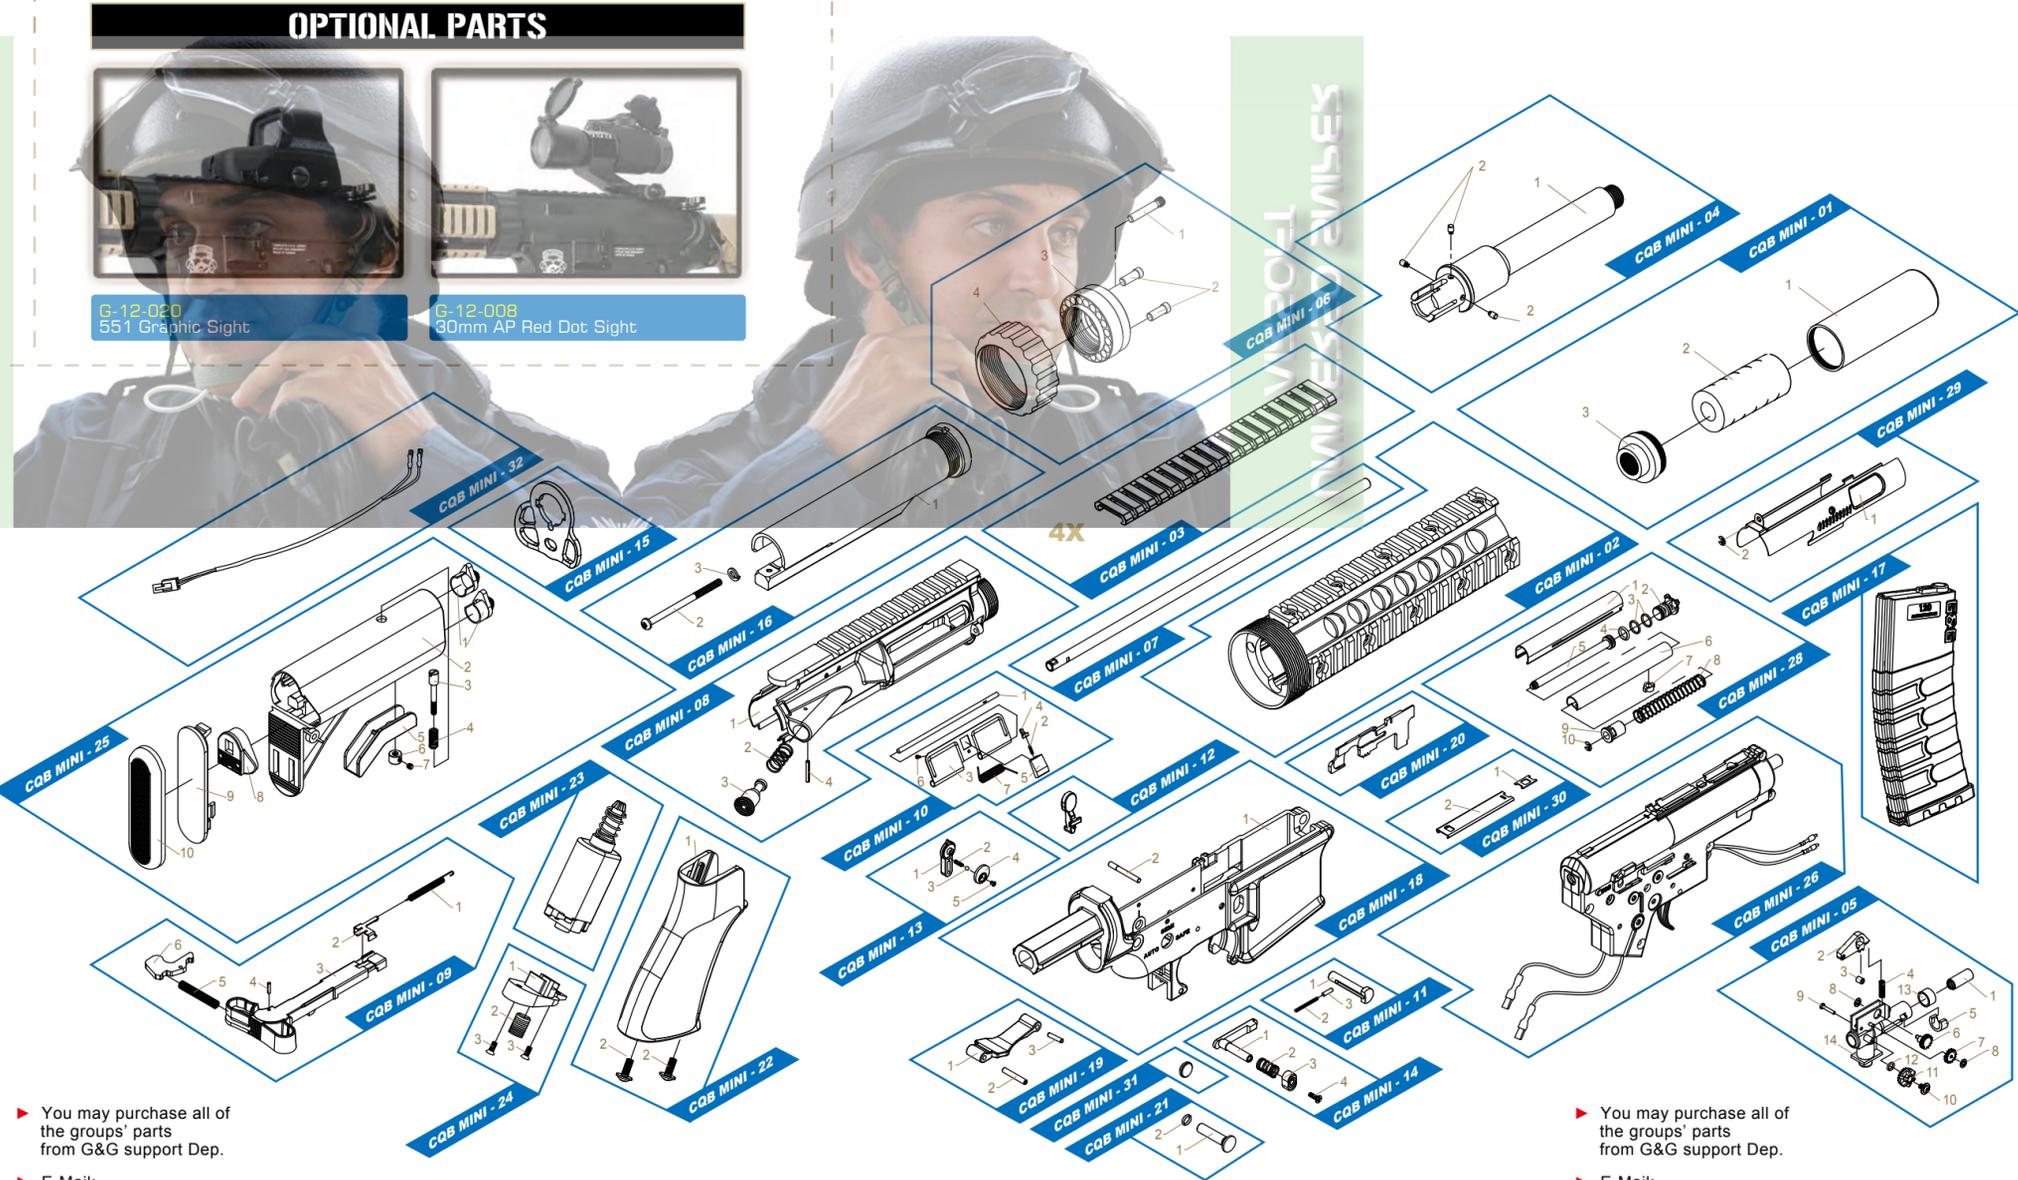

▶ You may purchase all of the groups' parts from G&G support Dep.
▶ E-Mail: support@guay2com

▶ You may purchase all of the groups' parts from G&G support Dep.
▶ E-Mail: support@guay2com