

# XT501 & X3300W MK2

## Tracer Engineer mode setting

LED meaning:

● Red light for selection of setting mode

● Green light for selection parameter of mode

Example:

●● = Red light blink twice, it is "Mode 2"

●●● = Green light blink 3 times, it is "Parameter 3"


Selection mode (Red light)			
LED color	Blink times	Mode name	Parameter of mode
Red, Mode 1	●	Adjust Brightness	4 Level, High, Middle, Low, ECO, Low
Red, Mode 2	●●	Adjust Power saving	3 modes, APO Off, APO, Motion detection
Red,, Mode 3	●●●	Exit setting	

Adjust parameter (Green light)				
Mode \ Parameter	●	●●	●●●	●●●●
Brightness	ECO	Low	Middle	High (default)
Power saving	APO Off No APO, 3D Motion detection	APO On Auto power off, 3D Motion detection (default)	Motion detect Auto power on/ off, Control by 3D Motion detection	-

\*\* 3D Motion detect: if 30 sec no motion that will into sleep mode. If moving that will wake up again.

\*\* APO On (Parameter 2): Auto power off after 30 mins without shot.

\*\* Low Power detection: Lower power automatically turn off to protect battery.

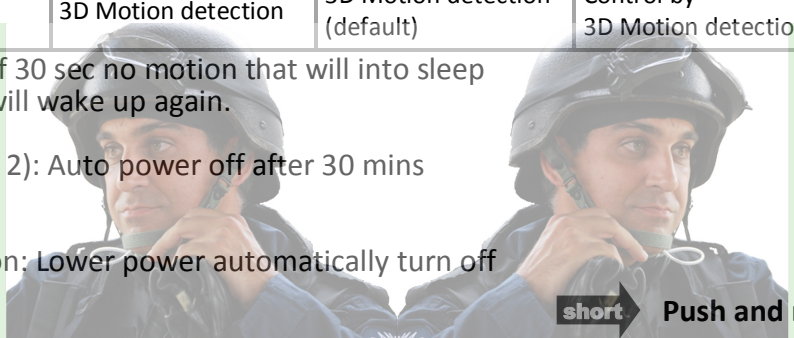

**short** → Push and release the power button.


**short** → **Power ON (Normal OP.)**

**LONG** → Push and hold 5sec. Then release the power button.



Green LED blinking to represent current Brightness setting.

Green LED blinking to represent current Power saving setting.

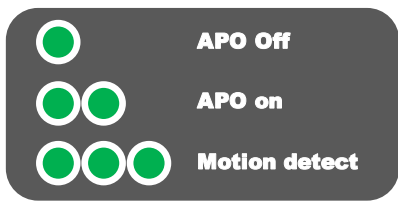

Save and return to Normal OP.

**short**

**LONG**

**LONG**

**short**