



air gun

GAS-TYPE

MP40

8mmBB BLOWBACK maxi8

LD-2 system installed

"Special barrel standard equipment"

User's manual

☆ Be sure to read through to the end before use.



Completely even if there is no sun bullet or gas

WARNING Not guaranteed to be safe. Be careful when handling this product.

Please pay attention to

- 当製品は、Intended for ages 18 and over.
- 注意！ There is a possibility of usage or careless invention or injury. ● We are not responsible for any damage caused by usage. ● This model is Brand (34g) and the BmmBB model is Using the 8mm88 outside day is. ● 235. It is set to work normally. Under any other conditions than the setting, just make sure it is correct.
- 当製品は、We are not responsible for any problems or accidents that may occur due to the use of 8mm.

RESERVED FOR THE
UNIVERSITY OF
VIRGINIA

★ In the case of the blowback model, there are parts that move. The parts will move, so please keep your face and fingers away.

★ not go

If a BB bullet hits your eyes, there is a risk of blindness or injury. Never look into the muzzle of a Nikken or with

★ or without 注意.

gas. Mouth direction Never point the muzzle at people, animals or light objects at any time. Also bounce Please be careful about coming BB.

● It's not a draw.

If you pull the trigger carelessly, there is an unexpected danger. Do not touch the trigger until you are about to shoot at the target.

★ Protect your eyes

If the BB hits your eyes, there is a risk of blindness. Wear airsoft goggles sometimes.

★ I don't do it

We are not responsible for any accidents caused by the usage of purchased parts or the use of external parts. I don't

★ 高温 want to be There

is a risk of explosion if the gas cylinder is left in a place with a temperature of 40°C or higher. Especially near the country, automatic Do not leave it in a car or in a sunny place.

★ Keep out of reach of children

保管する。

If a child under the target age touches the product, there is a risk of unexpected injury or accident. Please keep out of reach of children.

★ 銃を Always put in a pack when you take

out toys may be unexpectedly received by others. Please keep it in a safe state when you take it out or put it in your bag.

Modifications to increase gun power may be punishable by law.



Safer reproduction of the world's firearms

Marushin

332-0023 3450482531511 P

Target age 18 years old and over

<http://www.marushin-kk.co.jp/>

front sight

magazine catch

shoulder bead

trigger

magazine

△ Note

• The magazine is made of metal and is very heavy. If you drop it, there is a risk of injury or damage to things, so please be careful.

△ please note

• Shake the gas cylinder. If the amount of gas inside feels light, it is not enough to inject the gas. Please replace the gas cylinder.

• When the main unit is cold, or if it is too tight, it will interfere with the injection of gas and the firing of BB bullets. Please use after returning to room temperature.

• If gas leaks from between the injection valve and the nozzle, it may not be possible to inject it into our product due to the shape of the nozzle tip. Please.

• When the main body is full of gas, or immediately after injecting gas, white raw gas may come out of the muzzle when fired. In this state, the firing power will be low and unstable, so please do an empty shot with only the gas without inserting the BB bullet several times until the firing gas becomes appropriate.

△ Note

• Make sure to turn the magazine upside down and put the injection valve upward.

• Do not press the valve of a gas-filled magazine to release the gas all at once. The valve Q-ring will come off. You will run out of gas.

■ Injection of gas

bolts with no gas in the magazine

Pull out the magazine when in the shooting position. Will not come. If you pull it out forcibly, the main unit will be damaged. Yes. Please do not do this. Click 1.

Pull the bolt in the direction of the arrow (rearward) until it "clicks" into the cocked position. Then pull out the magazine from while pressing the magazine catch.

2. Hold the magazine upside down and inject gas by pressing the nozzle of the gas cylinder for air guns against the injection valve on the bottom arrow side.

No more gas. *If the gas in the magazine is completely empty, it will be full in about 20 to 30 seconds. in this state Around 40 shots can be fired and blown back.

* Be sure to use the gas for exclusive use of the air gun. Please do not use it for any other purpose. Leaving a gas-filled gun at a temperature of 40°C or higher is dangerous. In particular, do not leave it near a heater, in a car, or in a sunny place.

■ How to release the gas When you do not shoot the gun, release the gas for safety.

After confirming that there are no BB bullets, press the center of the injection valve on the bottom of the magazine with a thin object such as a branch to release the gas gradually. Be careful as the gas coming out is very cold.

マガジン・ローワーを引くとき、必ずマガジン・ローワーを引く方向に引くようにしてください。

マガジン・ローワーを引くとき、必ずマガジン・ローワーを引く方向に引くようにしてください。

マガジン・ローワーを下げて、マガジン・ローワーを引く方向に引くようにしてください。



警告

このマガジンは、0.34gの弾丸で構成されています。0.34gの弾丸を使用する場合は、必ず0.34gの弾丸を使用してください。0.34gの弾丸を使用しない場合は、必ず0.34gの弾丸を使用してください。

マガジン・ローワーを引くとき、必ずマガジン・ローワーを引く方向に引くようにしてください。

Beware of magazine

Launch preparation

警告

マガジン・ローワーを引くとき、必ずマガジン・ローワーを引く方向に引くようにしてください。

マガジン・ローワーを引くとき、必ずマガジン・ローワーを引く方向に引くようにしてください。

UNIVERSO SNIPER AIRSOFT




1. Pull the bolt in the direction of the arrow until it clicks into the cocking position.



UNIVERSO SNIPER AIRSOFT

Do not insert a magazine containing gas.

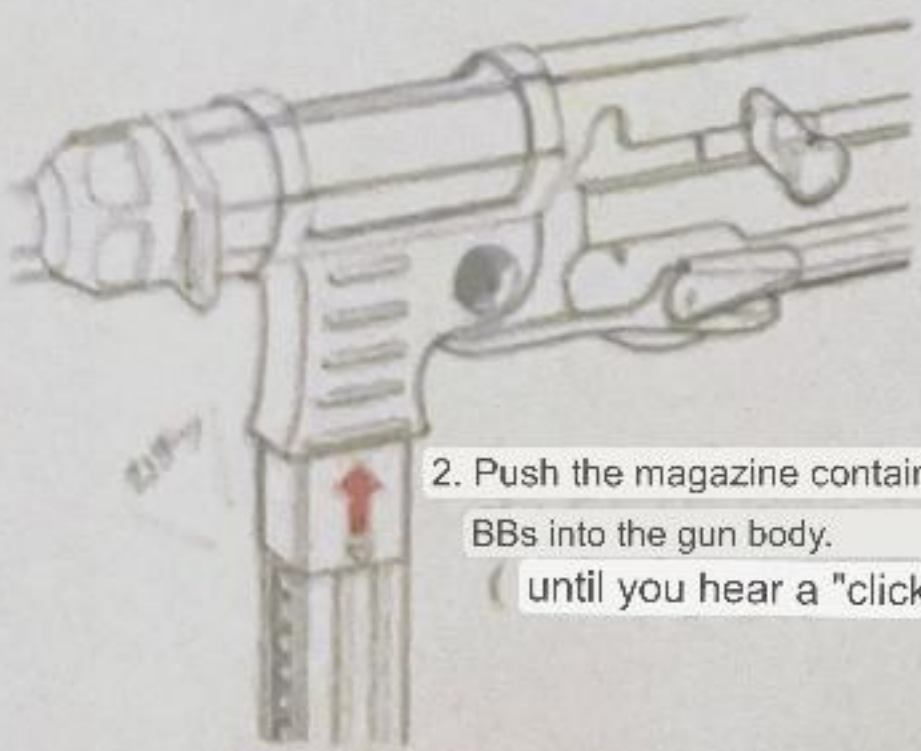

2. Push the magazine containing gas and BBs into the gun body. (until you hear a "click")



3. Make sure that the magazine does not come loose when pulled.

警告

マガジン・ローワーを引くとき、必ずマガジン・ローワーを引く方向に引くようにしてください。

警告

This operation will change. Please pay attention.

Beware of mountains

Due to its construction, the MP40 does not have safety devices like other models. To the last

the structure on the right is a real gun

and rear safety notch, just like the real thing. Please understand that there is nothing

About the safety structure in the real thing

Our MP40 can be completely constructed just by locking the operation of the bolt by aligning the bolt handle with the front

safety notch

safety notch

push in

hook

warn

Never attach a magazine to the gun with the handle in the safety notch. may be damaged.

Warning

Do not force the bolt with the handle in the safety notch. There is a risk of the gun firing.

Always wear air gun goggles when shooting. For

Beware of gas properties!

firing

your own safety, do not

-Repeated firing will cause the gas to cool down, resulting in lower firing power, unevenness, and lower blowback speed. If the magazine is cold, let it return to room temperature before use.

•When the ambient temperature is low, the firing power may be considerably reduced or the firing may not be possible.

•If you shoot the gun upside down or point it downward, white raw gas will be ejected and the BB bullet will not fire properly.

•These actuations are injected Depending on the state of the gas, it may not work perfectly every time due to the influence of the temperature, etc. This is not a malfunction, so please handle the gun with care by referring to the "Caution" notices in the instruction manual.

Our MP40 operates by pulling the trigger just like the real thing. Works only in Full Auto.

Click

(1) Pull the bolt in the direction of the arrow (backward) until it clicks into the cocking position. (2) Set the BB bullet and the gas-filled magazine in the gun as described.

warn

It is not possible to remove the magazine when the bolt is in the cocking position without gas in the magazine. Pulling it out forcibly may damage the gun body. Please do not do this.



Note

• If the operation of the bolt is inhibited, it will not operate correctly. Do not touch it or catch it on your clothes when blowing back. - The trigger

is completely fired every time you shoot Please go back to the front. mutual affection Otherwise, it will not work properly.

•Depending on the gas condition, it may not be fully automatic, but it is not a malfunction.



When the trigger is pulled, the B bullet is fired and the port is opened. [Full auto] Also, when the BB bullets in the magazine run out, the empty action is gripped

警告


Do not attach the bolt as it will make the bolt stronger.

作動中に部や部等を絶対に

When

Note

The correct way to hold a gun

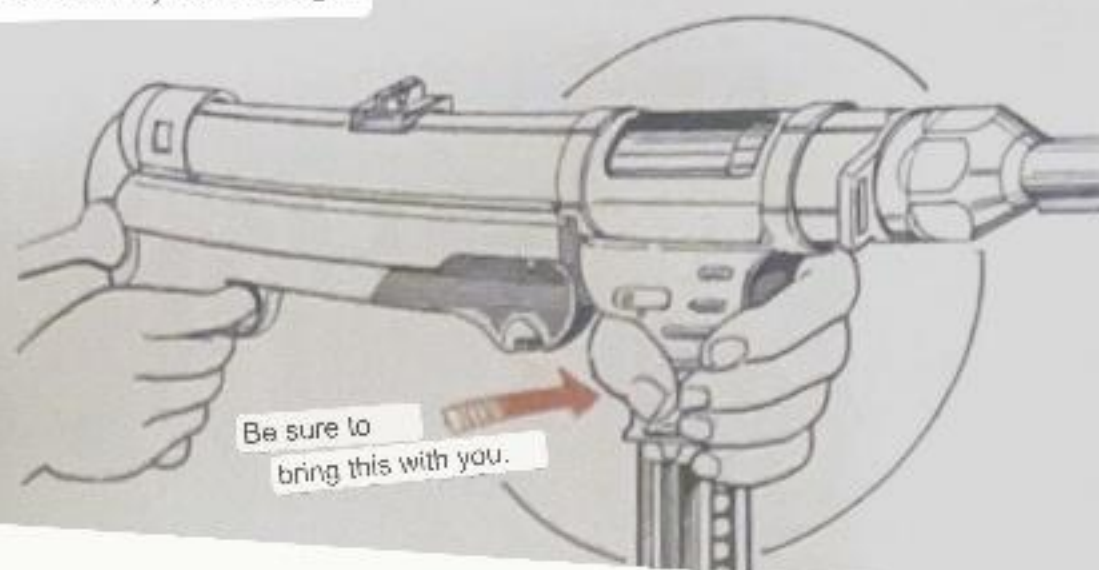

Be sure to bring this with you.

Do not use the upper part of the magazine as it will

These operations are affected by temperature and other factors depending on the state of the injected gas and do not necessarily operate perfectly every time. This is not a malfunction.

Checking the safety status of the main unit Be sure to check.



After shooting, the bolt is a projectile, so remove the magazine, check that the chamber and barrel are warm, and then pull the trigger to put it in the bolt state.

残弾 check



Even if you remove the magazine, there may be cases where BB bullets remain in the chamber. Push it from behind with a thin stick and let it come out of your mouth.

if you get stuck

If the freedom is clogged, lower the bolt and remove the BB bullet clogged in the inner barrel. extrude. BB bullets that have been used once or are deformed or Do not use it as it will get stuck.

About the "Superior Barrel" that comes standard with the maxi8 series

This is a patented new type parallel with a new idea. Our company's [maxi8] series is established by adopting this "superior parallel", and by using it together with the LD-2 system, it demonstrates performance superior to conventional products, achieving both power and accuracy in 8mmBB

What is the LD-2

system? LD = long distance

bullets. is possible. LD 2 Stem Packing causes BB bullet in the Inner Barrel
Aimed at "hit accuracy" by removing the disturbance of
It is a revolutionary system

by LD-2 system equipped barrel

△Caution

LD-2 adjustment screw

The effect changes just by turning the .
Please be careful not to turn it too much.

• Do not fire the gun in the direction of the shot as the BB bullet will fly in an unexpected direction.

• If there is oil on the BB bullet or the barrel, it will not be effective. In that case, repeat firing until the oil is gone, or wipe off the oil inside the barrel with a cotton swab.

• Turning the LD-2 adjusting screw too strongly will not only clog the bullet but also cause the LD-2 adjusting screw to fall out of the chamber, so adjust it little by little. Also, if bullets are clogged, turn the LD-2 adjustment screw in the direction of weakening and try again.

• When turning the LD-2 adjustment screw in the direction of weakening, make sure that the screw does not protrude from the outer surface of the chamber after adjustment.

About the LD-2 system

It is a system that extends the flight distance by giving rotation to the BB bullet. However, please understand that the trajectory is stable because BB bullets inevitably have variations in accuracy, and the flight of BB bullets is affected by temperature, wind, and gas conditions.




Adjust by turning the LD-2 adjustment screw at the arrowed part with the included wrench.

If you turn the LD-2 adjust screw to the stronger side, the BB bullet will be given a strong rotation and the flight distance will be extended.


Weak rotation

If you turn the LD-2 adjustment screw to the weakening side, the BB bullet will not rotate. If you turn it all the way to the weak side, the LD barrel The effect disappears and the BB bullet flies in a parabola.

■ Adjusting the rear sight

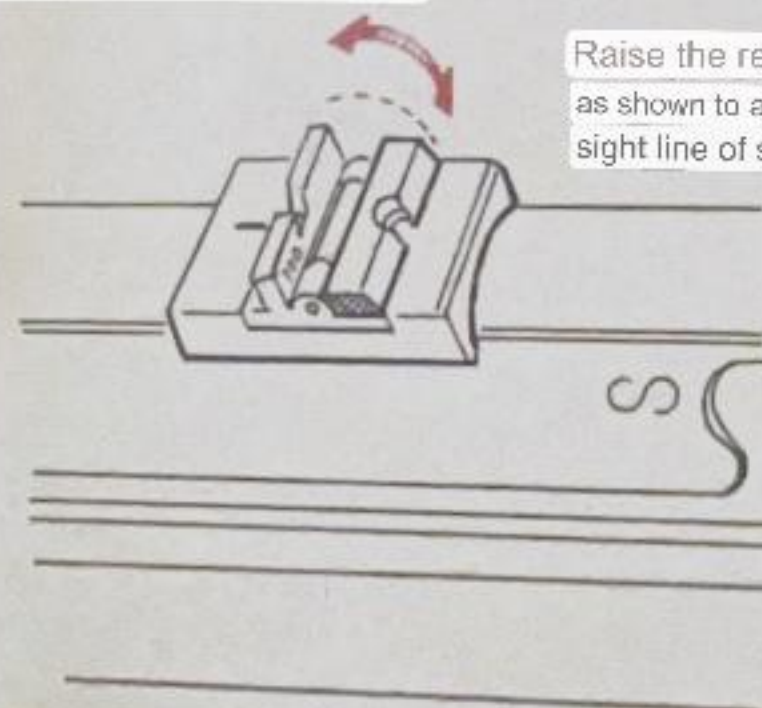


Raise the rear sight blade as shown to adjust the rear sight line of sight.

 please note

We will not be held responsible for any failures caused by misuse, disassembly, modification, or use of non-genuine parts.

How to operate the

stock Fold the stock

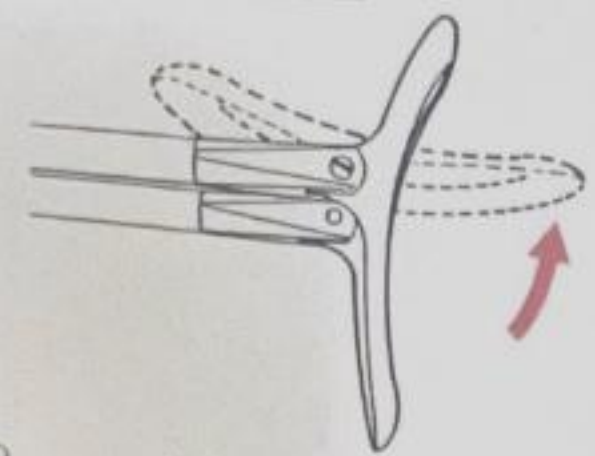


1. Fold down the shoulder piece and



2. While pressing the stock release button, move the stock to the position shown in the figure.
Please turn to

UNIVERSO SNIPER
AIRSOFT

UNIVERSO SNIPER
AIRSOFT

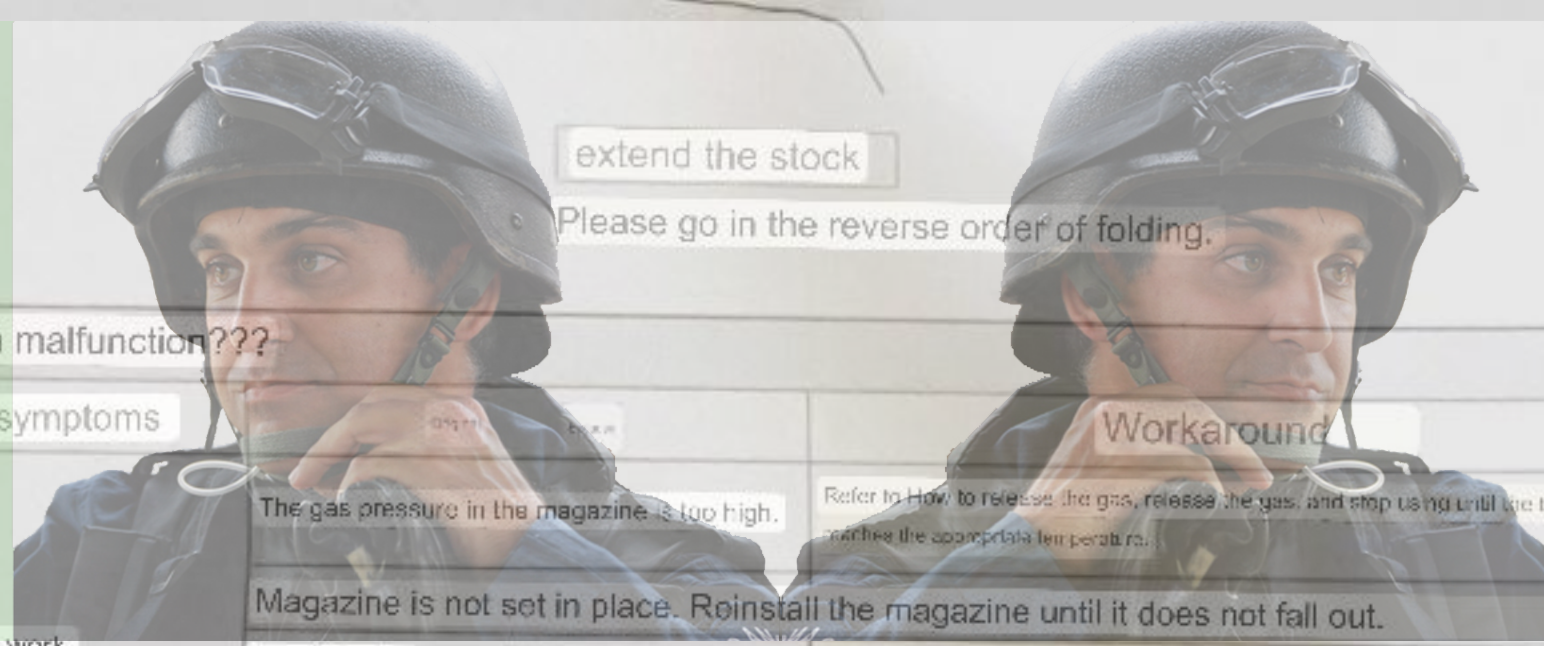

extend the stock

Please go in the reverse order of folding.

Is it a malfunction???

symptoms

Workaround

does not work	The gas pressure in the magazine is too high.	Refer to How to release the gas, release the gas, and stop using until the temperature reaches the appropriate temperature.
	Magazine is not set in place. Reinstall the magazine until it does not fall out.	
	Insufficient gas remaining in the gas cylinder I can't fill the gas cylinder.	Please use a new gas cylinder.
	Because the temperature is too low:	Please use it at warm temperature. Furthermore, the gas pressure drops due to the cooling of the magazine until it reaches the proper temperature. Please wait before using.
It blows back, but no BB bullets are fired.	BB bullet is not loaded.	Please load the BB bullet after referring to the loading of the daily bullet.
	BB bullets are not coming up to the top of the magazine.	Please refer to Loading BB bullets and reload the BB bullets.
BB bullets are not fired.	BB bullets are packed in the chamber.	Remove the jammed BB bullets.
	LD screw air too tight.	Remove the jammed BB bullet and loosen the LD screw. Please use it under
Slow bolt movement.	temperature too low.	the right temperature. Also, wait until it reaches the
	Decrease in gas pressure due to cooling of the magazine.	right temperature before using.

Please

In order to ensure the perfection of the product, we conduct an operation test before shipping. We pay close attention to the testing, but please understand that the moving parts may inevitably have a small amount of scratches.

decomposition eyes

Modifications to increase the power of the product may result in legal action.

Do not disassemble beyond maintenance level.

(please note

- Due to carelessness about trouble
- will be available.
- How to use, disassemble, and modify the purchased
- due to the use of external parts
- Accident etc.
- We do not take any responsibility
- not.

Gas MP40 8mmBB BLOWBACK

There are some parts that cannot be done. Also, please note that parts may be changed without notice.

Parts list and price list

1	バットフー	¥4,000	41	マガジンリップ	¥4,000	91	バレル	¥1,000
2	バットフー	¥4,000	42	マガジンリリースボタン	¥4,000	92	バレル	¥1,000
3	バットフー	¥4,000	43	マガジンリリースボタン	¥4,000	93	バレル	¥1,000
4	バットフー	¥4,000	44	マガジンリリースボタン	¥4,000	94	バレル	¥1,000
5	バットフー	¥4,000	45	マガジンリリースボタン	¥4,000	95	バレル	¥1,000
6	バットフー	¥4,000	46	マガジンリリースボタン	¥4,000	96	バレル	¥1,000
7	バットフー	¥4,000	47	マガジンリリースボタン	¥4,000	97	バレル	¥1,000
8	バットフー	¥4,000	48	マガジンリリースボタン	¥4,000	98	バレル	¥1,000
9	バットフー	¥4,000	49	マガジンリリースボタン	¥4,000	99	バレル	¥1,000
10	バットフー	¥4,000	50	マガジンリリースボタン	¥4,000	100	バレル	¥1,000
11	バットフー	¥4,000	51	マガジンリリースボタン	¥4,000	101	バレル	¥1,000
12	バットフー	¥4,000	52	マガジンリリースボタン	¥4,000	102	バレル	¥1,000
13	バットフー	¥4,000	53	マガジンリリースボタン	¥4,000	103	バレル	¥1,000
14	バットフー	¥4,000	54	マガジンリリースボタン	¥4,000	104	バレル	¥1,000
15	バットフー	¥4,000	55	マガジンリリースボタン	¥4,000	105	バレル	¥1,000
16	バットフー	¥4,000	56	マガジンリリースボタン	¥4,000	106	バレル	¥1,000
17	バットフー	¥4,000	57	マガジンリリースボタン	¥4,000	107	バレル	¥1,000
18	バットフー	¥4,000	58	マガジンリリースボタン	¥4,000	108	バレル	¥1,000
19	バットフー	¥4,000	59	マガジンリリースボタン	¥4,000	109	バレル	¥1,000
20	バットフー	¥4,000	60	マガジンリリースボタン	¥4,000	110	バレル	¥1,000
21	バットフー	¥4,000	61	マガジンリリースボタン	¥4,000	111	バレル	¥1,000
22	バットフー	¥4,000	62	マガジンリリースボタン	¥4,000	112	バレル	¥1,000
23	バットフー	¥4,000	63	マガジンリリースボタン	¥4,000	113	バレル	¥1,000
24	バットフー	¥4,000	64	マガジンリリースボタン	¥4,000	114	バレル	¥1,000
25	バットフー	¥4,000	65	マガジンリリースボタン	¥4,000	115	バレル	¥1,000
26	バットフー	¥4,000	66	マガジンリリースボタン	¥4,000	116	バレル	¥1,000
27	バットフー	¥4,000	67	マガジンリリースボタン	¥4,000	117	バレル	¥1,000
28	バットフー	¥4,000	68	マガジンリリースボタン	¥4,000	118	バレル	¥1,000
29	バットフー	¥4,000	69	マガジンリリースボタン	¥4,000	119	バレル	¥1,000
30	バットフー	¥4,000	70	マガジンリリースボタン	¥4,000	120	バレル	¥1,000
31	バットフー	¥4,000	71	マガジンリリースボタン	¥4,000	121	バレル	¥1,000
32	バットフー	¥4,000	72	マガジンリリースボタン	¥4,000	122	バレル	¥1,000
33	バットフー	¥4,000	73	マガジンリリースボタン	¥4,000	123	バレル	¥1,000
34	バットフー	¥4,000	74	マガジンリリースボタン	¥4,000	124	バレル	¥1,000
35	バットフー	¥4,000	75	マガジンリリースボタン	¥4,000	125	バレル	¥1,000
36	バットフー	¥4,000	76	マガジンリリースボタン	¥4,000	126	バレル	¥1,000
37	バットフー	¥4,000	77	マガジンリリースボタン	¥4,000	127	バレル	¥1,000
38	バットフー	¥4,000	78	マガジンリリースボタン	¥4,000	128	バレル	¥1,000
39	バットフー	¥4,000	79	マガジンリリースボタン	¥4,000	129	バレル	¥1,000
40	バットフー	¥4,000	80	マガジンリリースボタン	¥4,000	130	バレル	¥1,000

Single raised method

I don't get it. Senga

After inquiring about our after-sales service in advance

Please build

details, failure when used

will be in addition, there are many cases of remodeling.

I will.

Abbat Tel 046259)1511

or after-sales service

TEL 0462-0023 埼玉県川口市西區3-9-35

(from 4:30 p.m.)

(How to apply for parts)

Please place your order at your retailer.

Please keep it small. To be in the form of sending payment

There is no need

TEL 048(253)0101 Marushin

Industry Co., Ltd.

TEL 048-253-0023 埼玉県川口市西區3-9-35

Open 2nd and 3rd Saturdays and Sundays from 9:00 am to 4:30 pm

Inquiries about products TEL 048 (2570070