

OPERATOR MANUAL FOR THE V3X Tactical Illuminator V3X-01

1. insert the Remote Cable Switch in to the Remote Jack and attach the pressure pad in a comfortable location on the firearm with the Velco adhesive.
2. Turning the Power Switch to the MOM position and pressing the RemoteCable Switch Pad will activate the V3X until the pressure pad is release.



VegaForce Company

TEL: +886-2-2203-6630
FAX: +886-2-2203-6610
E-mail: sales@gb-tech.com.tw
No.68, Jianguo 2nd Rd., Xinzhuang City, Taipei County 242, Taiwan
<http://www.gb-tech.com.tw>



Rev.0


26 October 2010

INSTALL THE BATTERY


1. OPEN THE BACK PLATE



3. CLOSE THE BACK PLATE



2. INSTALL THE BATTERY

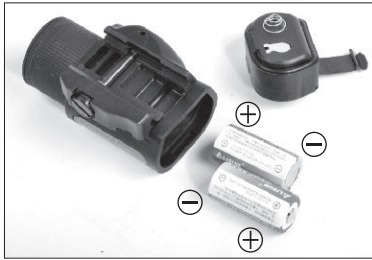

NOTE:
Use the RCR123A or 16340 recharger battery X 2

Replacement & Optional Parts



REFLECTOR
VF9-VLT-REF-01



CREE Q5 LED MODULE
VF9-VLT-LEDQ5-01




RCR123 BATTERY
OUTS-BAT-0009



REMOTECABLE SWITCH
VF9-VLT-SWPBK01
VF9-VLT-SWP-TN01

OPERATOR

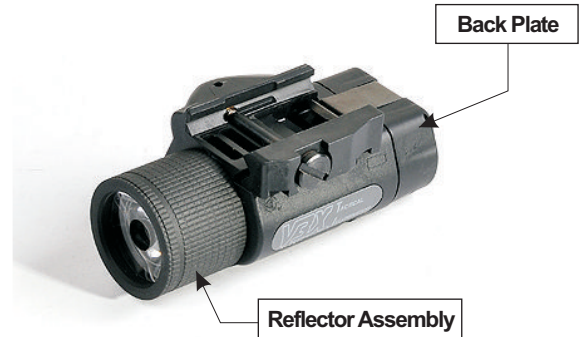

Switch Operator

The power switch for the V3X is located on the Back Plate. To provide maximum flexibility, three style of Back Plate are available. Switch operation for each style is as follows:

OFF position



Turn off the V3X.

MOM position



Use the Remote Cable Switch.

ON position



Steady-ON the V3X.