


G&G 1-4X OPTICAL SIGHT




BATTERY SETTING

Turn the battery cap counterclockwise to take off it.

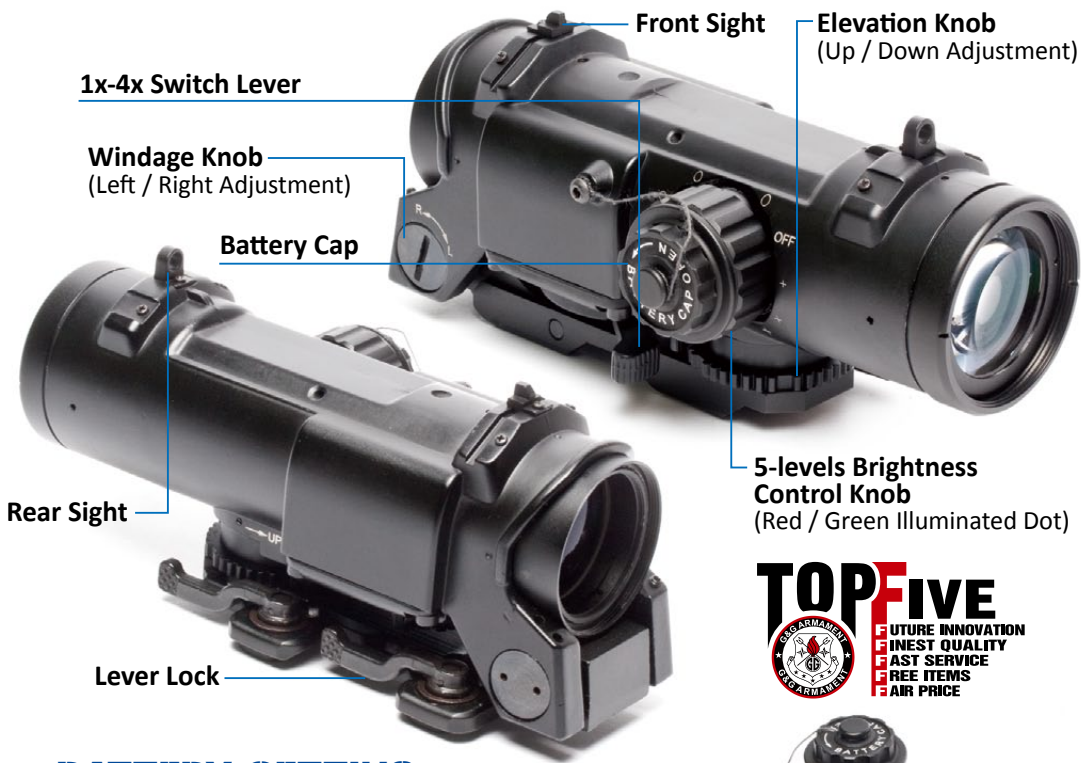

Insert the battery into the optical sight and turn the battery cap clockwise to close it.

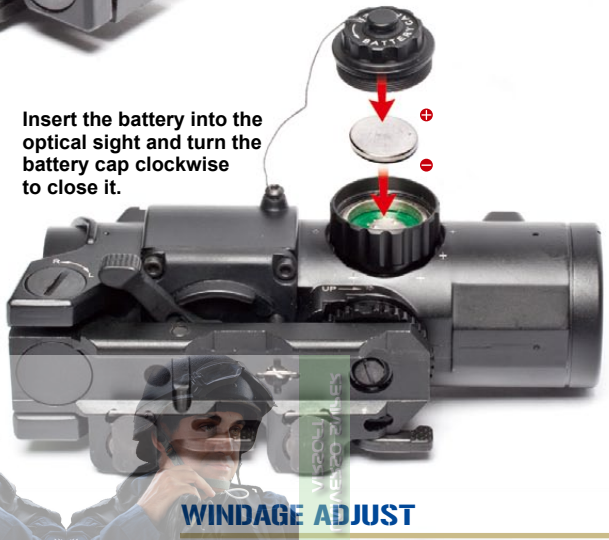

1X-4X MAGNIFICATION ADJUSTMENT


4X MAGNIFICATION

Press the switch lever and set it to an appropriate position.




1X MAGNIFICATION

Press the switch lever and set it to an appropriate position.

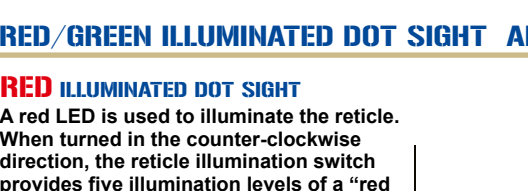

WINDAGE ADJUST

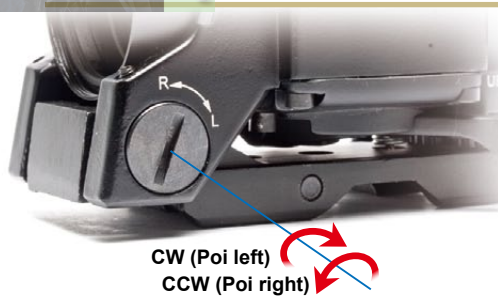

CW (Poi left)
CCW (Poi right)

ELEVATION ADJUST



When the lock is in the UP position, the dial may be used to adjust the elevation of the Point of Impact (POI) 1/2 Minute of Angle (MOA) per click. If the zero lock is DOWN, the zero dial is locked in place and the sight elevation is fixed.

RED/GREEN ILLUMINATED DOT SIGHT ADJUSTMENT 5-levels brightness control



RED ILLUMINATED DOT SIGHT

A red LED is used to illuminate the reticle. When turned in the counter-clockwise direction, the reticle illumination switch provides five illumination levels of a "red dot" aiming mark.



GREEN ILLUMINATED DOT SIGHT

A green LED is used to illuminate the reticle. When turned in the counter-clockwise direction, the reticle illumination switch provides five illumination levels of a "green dot" aiming mark.

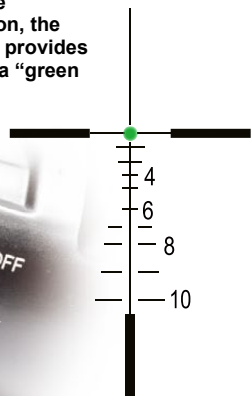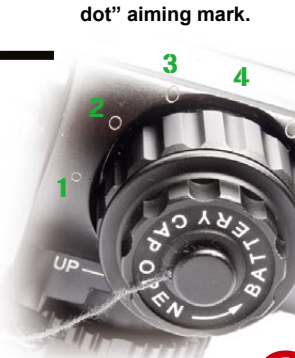

WARNING: Clear the gun from BBs and put the selector switch to safe mode before mounting the sight!



GUAY2.COM